





## DESCRIPTION

The LED VT Series is created to stand up to harsh, wet conditions. Replace a typical HID or fluorescent fixture with a single fixture that consumes significantly less energy. Environmentally safe - no mercury in the fixture.

## SPECIFICATIONS

<b>Lumens:</b>	8,800 (nominal)	17,600 (nominal)
<b>Wattage:</b>	75	150
<b>Listed/Rated:</b>	UL, IP65, IP66, IP67, NEMA 4X, NSF	
<b>Color Temp:</b>	5000K	
<b>CRI:</b>	>82	
<b>Line Voltage:</b>	Universal 120-277V	
<b>Power Supply:</b>	11ft. Whip standard. Hardwire option.	
<b>Surge Protection:</b>	Integrated 2.5kV transient voltage protection	
<b>Ambient Operating Temperature:</b>	-40° to 40° C / -40° to 104° F	
<b>Environment:</b>	Wet rated	
<b>Lens:</b>	Opaque white. Other lenses available.	
<b>Mount:</b>	Optional ceiling mount, rigid mount or wire hanger with V-hook	
<b>Warranty:</b>	5-year Standard Limited	
<b>Manufacturer:</b>	Genesis Energy Technology	

ITEM	DESCRIPTION	IMAGE	APPLICATION
<b>RIGID MOUNT</b>	316 Stainless Steel or Zinc Plated HSLA		
<b>CEILING MOUNT</b>	Stainless Steel ceiling mount attaches directly to ceiling		
<b>WIRE HANGER WITH V-HOOK</b>	Stainless Steel V-hook		

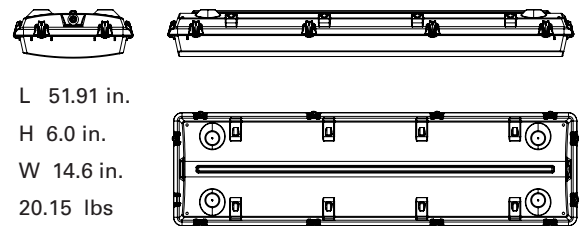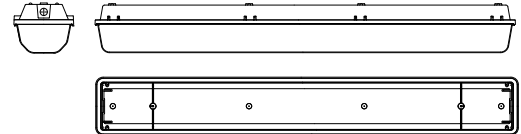

## ORDERING INFORMATION

EXAMPLE: **VT75-UNF1-50WH-HWCM** Lead times and costs may vary depending on options selected. Consult your sales representative for more information. Standard configuration highlighted in Gray.

VT		UN			WH		
Model	Wattage	Voltage	Lens / Optics	Color Temp	Fixture Color	Power Supply	Mounting
<b>VT:</b> Vapor Tight	<b>75:</b> 75W <b>150:</b> 150W	<b>UN:</b> Universal	<b>F1:</b> Opaque white <b>P1:</b> Polycarbonate	<b>50:</b> 5000K <b>40:</b> 4000K	<b>WH:</b> White	<b>W1:</b> 11' Whip <b>HW:</b> Hardwire	<b>CM:</b> Ceiling mount <b>RM:</b> Rigid mount <b>WH:</b> Wire hanger with V-hook

Specifications subject to change without notice.